

TRUE MANUFACTURING CO., INC.

2001 East Terra Lane • O'Fallon, Missouri 63366-4434 • (636)240-2400 Fax (636)272-2408 • Toll Free (800)325-6152 • Intl Fax# (001)636-272-7546 Parts Dept. (800)424-TRUE • Parts Dept. Fax# (636)272-9471 • www.truemfg.com

Project Name:		AIA #
Location:		
Item #:	Qty:	SIS #
Model #:		

Model:

Glass Door Merchandiser:

GDM-09-SQ-S-HC-LD

Slide Door Counter-Top Stainless Steel Exterior Squared Refrigerator with Hydrocarbon Refrigerant & LED Lighting



GDM-09-SQ-S-HC-LD


- The world's #1 manufacturer of glass door merchandisers.
- True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.
- Designed for convenient access, fast service, and attractive display.
- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- Exterior gleaming stainless steel for those who appreciate the value of stainless.
- Interior attractive, NSF approved, white aluminum interior liner with stainless steel
- Self closing doors. Counter-balanced weight system for smooth, even, positve closing.
- "Low-E", double pane thermal insulated glass door assemblies with mitered plastic channel frames. The latest in energy efficient technology.
- LED interior lighting provides more even lighting throughout the cabinet. Safety
- Entire cabinet structure is foamed-inplace using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).

ROUGH-IN DATA

Specifications subject to change without notice. Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

			Cabinet Dimensions (inches) (mm)					NEMA	Cord Length (total ft.)	Crated Weight (lbs.)	
Model	Doors	Shelves	W	D†	Н	HP	Voltage	Amps	Config.	(,	(kg)
GDM-09-SQ-S-HC-LD	2	3	36	22¾	40	1/6	115/60/1	1.9	5-15P	9	TBD
			913	567	1014	N/A		N/A		2.74	TBD

† Depth does not include %" (23 mm) for door handles.



Model:

GDM-09-SQ-S-HC-LD

Glass Door Merchandiser:

Slide Door Counter-Top Stainless Steel Exterior Squared Refrigerator with Hydrocarbon Refrigerant & LED Lighting



STANDARD FEATURES

DESIGN

 True's commitment to using the highest quality materials and oversized refrigeration systems provides the user with colder product temperatures, and lower utility costs in an attractive merchandiser that brilliantly displays packaged food and beverages.

REFRIGERATION SYSTEM

- Factory engineered, self-contained, capillary tube system using environmentally friendly R290 hydrocarbon refrigerant that has zero (0) ozone depletion potential (ODP), & three (3) global warming potential (GWP).
- High capacity, factory balanced refrigeration system that maintains cabinet temperatures of 33°F to 38°F (.5°C to 3.3°C) for the best in food preservation.
- State of the art, electronically commutated evaporator and condenser fan motors. ECM motors operate at higher peak efficiencies and move a more consistent volume of air which produces less heat, reduces energy consumption and provides greater motor reliability.

CABINET CONSTRUCTION

 Exterior - gleaming stainless steel for those who appreciate the value of stainless.

- Interior attractive, NSF approved, white aluminum liner with stainless steel floor.
- Insulation entire cabinet structure is foamed-in-place using a high density, polyurethane insulation that has zero ozone depletion potential (ODP) and zero global warming potential (GWP).
- · Cabinet fitted with leg levelers.
- Illuminated exterior sign panel. Variety of sign options available.

DOORS

- "Low-E", double pane thermal insulated glass door assemblies with mitered plastic channel frame. The latest in energy efficient technology.
- Each door fitted with 12" (305 mm) long handles.
- Self closing doors. Counter-balanced weight system for smooth, even, positve closing.

SHELVING

- Three (3) adjustable, heavy duty PVC coated wire shelves: two (2) 31 ¾" x 15" (807 mm x 381 mm) and one (1) 31 ¾" x 8 ¾" (807 mm x 215 mm). Four (4) chrome plated shelf clips included per shelf.
- Shelf support pilasters made of same material as cabinet interior; shelves are adjustable on ½" (13 mm) increments.

LIGHTING

 LED interior lighting provides more even lighting throughout the cabinet. Safety shielded.

MODEL FEATURES

- Evaporator is epoxy coated to eliminate the potential of corrosion.
- See our website www.truemfg.com for latest color and sign offerings.
- NSF/ANSI Standard 7 compliant for the storage and/or display of packaged or bottled product.

ELECTRICAL

 Unit completely pre-wired at factory and ready for final connection to a 115/60/1 phase, 15 amp dedicated outlet. Cord and plug set included.





OPTIONAL FEATURES/ACCESSORIES

Upcharge and lead times may apply. ☐ Ratchet locks

- ☐ Additional shelving
- ☐ Gravity feed 20oz. Bottle display system



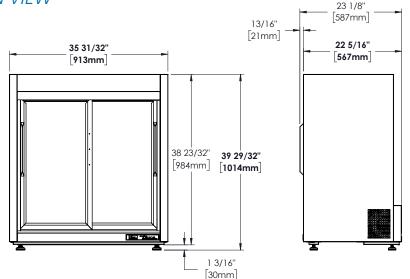



WARRANTY

Three year warranty on all parts and labor and an additional 2 year warranty on compressor. (U.S.A. only) METRIC DIMENSIONS ROUNDED UP TO THE NEAREST WHOLE MILLIMETER

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

KC	50 5	Model	Elevation	Right	Plan	3D	Back
	KCL	GDM-09-SQ-S-HC-LD					

TRUE MANUFACTURING CO., INC.